

SIGRATHERM® GFA


Material: Graphite soft felt
Application: High-temperature insulation

Material data of SIGRATHERM® GFA

Typical properties	Units	GFA5	GFA10	GFA15
Thickness	mm [in]	6 [1/4]	11.5 [1/2]	16 [5/8]
Area weight	g/m ²	500	1000	1500
Width (max.)	mm [in]	1350 [53]	1350 [53]	1350 [53]
Length	m [ft]	25 – 30 [82 – 98]	25 – 30 [82 – 98]	25 – 30 [82 – 98]
Ash content	ppm	1000	1000	1000
Ash content [purified grade]	ppm	< 20	< 20	< 20
Max. application temperature	°C [°F]	2000 [3600] in vacuum or inert gas	2000 [3600] in vacuum or inert gas	2000 [3600] in vacuum or inert gas

Values without tolerance represent typical average values. For any engineering/design purposes please always contact our technical sales team.

Thermal conductivity of SIGRATHERM GFA as a function of temperature [inert gas and vacuum atmosphere]

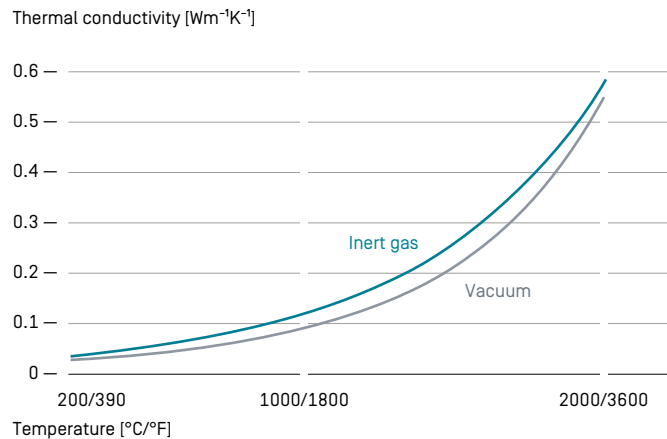

Customized thickness and cut to size on request.



Graphite Solutions | SGL CARBON GmbH
 Sales Europe/Middle East/Africa | felt-europe@sglcarbon.com
 Sales Americas | felt-americas@sglcarbon.com
 Sales Asia/Pacific | felt-asia@sglcarbon.com
 www.cfrc-and-felts.com | www.sglcarbon.com

TDS GFA.00
 07 2021/0 1NÄ Printed in Germany
 ®registered trademarks of SGL Carbon SE

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should therefore not be construed as guaranteeing specific properties of the products described or their suitability for a particular application. Any existing industrial property rights must be observed. The quality of our products is guaranteed under our "General Conditions of Sale".